



TrowelFast™ Vinyl Flooring Adhesive




Install flooring faster.



**RESISTS
ADHESIVE
DISPLACEMENT**
and disbonding under
heavy rolling loads

Moisture
resistant up to
**95% RH /
10 lbs. MVER**

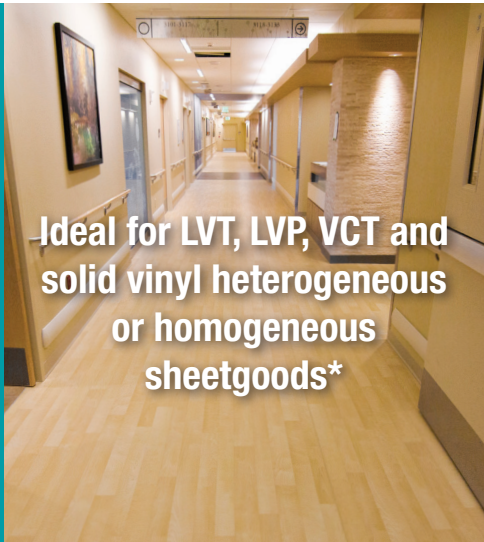

Ideal for LVT, LVP, VCT and
solid vinyl heterogeneous
or homogeneous
sheetgoods*

**FAST
DRYING**
Accepts flooring as
soon as 10-20 minutes



**HEAT WELD
AFTER 60 MINS**

**EXTENDED
OPEN TIME**
allows flooring
installation for up
to 6-8 hours

For complete details, visit tecspecialty.com

*Refer to product data sheet or call the technical support line 800-832-9023 for an approved list of flooring.

TEC® TrowelFast™ Vinyl Flooring Adhesive is a breakthrough, user-friendly adhesive which is ideal for vinyl tile, vinyl plank, vinyl composition tile and solid vinyl sheetgoods*. This unique, low odor formulation dries quickly, has excellent resistance to moisture and alkali, provides a long open time and is easy to clean up. For details about TEC® product or system warranties, contact your sales associate or visit tecspecialty.com.



Ideal for LVT, LVP, VCT and solid vinyl heterogeneous or homogeneous sheetgoods*



Fast drying, accepts flooring in 10-20 minutes



Heat weld as soon as 60 minutes

*Do not use with fiberglass-backed vinyl sheetgoods, nor directly over peel and stick tile. Not recommended for use with felt-backed or mineral-backed vinyl sheetgoods, linoleum or rubber. Refer to product data sheet or call the technical support line 800-832-9023 for an approved list of flooring.

Additional Features and Benefits

- Resists flooring indentations and disbonding under heavy rolling loads (hospital beds, furniture, etc.)
- Moisture resistant up to 95% RH / 10 lbs. MVER**
- Extended open time (6-8 hours)
- Fast drying accepts flooring in 10-20 minutes
- Heat weld as soon as 60 minutes
- Solvent free and low VOC (VOC <1 g/L)
- LEED® Compliant and CRI Green Label Plus Certified

**Over newly poured concrete, with declining moisture values, and a vapor barrier beneath the slab

Packaging

3.5 gallon pail (13,25 L)

Product #7200901211

Coverage

Determine recommended trowel size based on the flooring type. Figures below are presented only as guidelines.

General Flooring Types	Recommended Trowel Size	Approximate Coverage
Standard Vinyl Flooring	1/16" x 1/32" x 5/64" U-Notch Trowel	270-290 ft²/US Gallon (25-27 m²/3,78 L)
Stiff Heavy Vinyl Flooring	1/16" x 1/32" x 1/32" U-Notch Trowel	225-250 ft²/US Gallon (21-23,2 m²/3,78 L)
Integrated Cushion Back	1/16" x 1/16" x 1/16" Square-Notch Trowel	190-220 ft²/US Gallon (17,7-20,4 m²/3,78 L)

Suitable Substrates

When properly prepared, suitable substrates include:

- Concrete (all grade levels)
- Underlayment grade plywood
- Gypsum substrates (properly prepared)
- Well bonded, smooth, wax-free, existing single layer non-cushioned resilient flooring.

Technical Data

Physical Properties

Description	
Base	Polymer latex
Physical State	Medium paste
Color	Off white
Open Time	6-8 hours depending on substrate porosity
Weight per Gallon	8.7 lbs/gallon
VOC/Liter of Material	<1 gram (calculated)
Freeze/Thaw Stability	Stable for 3 cycles at 10°F (-12°C)
Storage	For optimal shelf life, store at a moderate room temperature, in closed containers, and protect this adhesive from freezing. If frozen, allow to return to room temperature slowly and stir before use. Avoid prolonged or repeated freeze thaw cycles.
Shelf Life	Maximum 1 year from date of manufacture in unopened package.

For complete details visit tecspecialty.com