

# FLOORING INSTALLATION PRODUCTS



FLOORING ADHESIVE &  
SURFACE PREPARATION CATALOG







TEC® is a leading brand of high quality, technologically advanced products for the installation and surface preparation of wood and resilient floor coverings.

For over 60 years, we have scientifically designed products that streamline the installation process so you can work efficiently without sacrificing quality. Creating problem-solving products that perform to the highest standards is at the core of what we do every day.

We know you work hard. That's why we develop solutions that solve your toughest problems. From our top performing surface prep products, to our innovative resilient and wood adhesives, we have solutions that save you time and money, so that you can work smarter. Every day.

**TEC® is a proud partner of:**



# Table of Contents

## Surface Preparation

- Introduction - Page 4
- Moisture Mitigation - Page 5
- Patches and Patch Additives - Pages 6-8
- Overlayment and Self-Leveling Underlayments - Pages 9-12
- Primers - Page 13

## Flooring Adhesives

- Introduction - Page 14
- Multipurpose Adhesives - Pages 15-16
- Carpet Adhesives - Pages 16-18
- Resilient Adhesives - Pages 19-21
- Cove Base Adhesive - Page 21
- Wood Flooring Adhesives - Pages 22-23

## Warranties

- Reference Guide for Limited System Warranties - Pages 24-25



# Surface Preparation



## PREP FOR SUCCESS

TEC® surface preparation products have been engineered to make your job easier. From our fast-drying, one coat moisture mitigation product, to our fast-drying, cement-based underlayment for deep fills, we offer products that save you time and money without compromising quality.

- Moisture Mitigation
- Patches and Patch Additives
- Overlayment and Self-Leveling Underlayments
- Primers

# Moisture Mitigation

## LiquiDam EZ™ Moisture Vapor Barrier

**214**

A 1-part moisture vapor barrier that offers an easier alternative over traditional, epoxy-based moisture mitigation products by eliminating waste in mixing and priming and often does not require shot blasting. It effectively reduces moisture over damp or new concrete with a moisture vapor emission rate (MVER) less than or equal to 25 lbs. per 1,000 ft<sup>2</sup> per 24 hours or a maximum relative humidity of 100%. It is designed to reduce the MVER from 25 lbs. to 3 lbs. per 1,000 ft<sup>2</sup> per 24 hours. Two coats are required to fully seal the substrate, and it quickly dries in as soon as 4-5 hours. Once dry, this product doesn't require a primer before the application of TEC® surface preparation products.

- Same day flooring installation—both coats dry within 3-4 hours
- Direct application onto green concrete up to 100% RH
- Less than 0.10 Perm Rating (ASTM E96)
- No primer required before the application of surface preparation products
- No waste and no special handling required
- Low VOC

**Available in:    Item Number:**

**5 gallon pail    71-4499-1511**



## LiquiDam™ Penetrating Moisture Vapor Barrier

**213**

A proven moisture mitigation solution that is ideal for damp or new concrete as little as 48 hours old. LiquiDam™ is a low viscosity, high penetrating, two-part 100% solids epoxy. It has a moisture vapor emission rate (MVER) less than or equal to 25 lbs. per 1,000 ft<sup>2</sup> per 24 hours (0.12 kg/m<sup>2</sup> per 24 hours) or a maximum relative humidity RH of 100%. It is designed to reduce the MVER to less than 3 lbs. per 1,000 ft<sup>2</sup> per 24 hours (0.015 kg/m<sup>2</sup> per 24 hours).

- Only one coat needed
- Same day flooring installation - cures within 4-5 hours
- Direct application onto green concrete up to 100% RH
- Meets ASTM F3010 product requirements for moisture mitigation systems under resilient floor coverings
- Less than 0.10 Perm Rating (ASTM E96)
- Pot life of 25 minutes
- Coverage rate of 180 ft<sup>2</sup> per blended gallon (3.7 m<sup>2</sup>/L)
- Low VOC

**Available in:    Item Number:**

**1 gallon kit    70-9974-1011**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Surface Preparation



# Surface Preparation

## Patches and Patch Additives

### Feather Edge Skim Coat

**330**

A high-quality, cement-based compound designed to skim coat, smooth and level irregularities from featheredge up to 1/2" (12 mm). Excellent for use over most substrates and provides a suitable surface for even the most demanding floor coverings, such as VCT, sheet vinyl, etc. It is ideal for use as an embossing leveler when mixed with TEC® Patch Additive (embossing applications require TEC Patch Additive. No patch additive is required if surface has been primed with TEC Multipurpose Primer).

- Fast-setting—install flooring in as soon as 15-20 minutes
- For most applications, use of a primer is not required
- Sandable
- Zero VOC

**Available in:**      **Item Number:**

**10 lb. plastic bag**    **33-0386-3311**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

### Floor Patch Pro

**059**

A fast setting, easy-to-mix, calcium-aluminate cement-based patch and skim coating compound for use under ceramic tile, hardwood flooring, resilient flooring, VCT and carpet, from a featheredge to 2" (5 cm) in thickness. It can be applied to concrete with an RH up to 90%.

- Initial set in 15 minutes
- Accepts tile and stone as well as moisture sensitive floor coverings in as little as 30 minutes (or when completely dried)
- Can be used as an embossing leveler
- Zero VOC

**Available in:**      **Item Number:**

**25 lb. bag**      **71-6046-0013**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Fast-Set Deep Patch

**305**

A cement-based underlayment that is designed specifically for deep fills, ramping, and leveling concrete and plywood subfloors (dry areas only) from featheredge up to 1 1/2" (38 mm) in a single application, up to 5" (12 cm) with proper aggregate. It can be applied with a steel trowel, float and/or screed to produce a smooth, level surface.

- Walkable hardness in 60 minutes, apply most floor coverings in 1 1/2 hours
- 4,200 psi compressive strength
- Zero VOC

**Available in:**      **Item Number:**

**25 lb. bag**            **70-5689-3011**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## VersaPatch® Latex Modified Floor Patch

**327**

A fast-setting, cement-based product designed for patching voids and irregularities in wood, concrete and most existing floor materials. The resulting finish is ideal for the installation of sheetgoods, resilient tile, carpet, wood and ceramic or stone tile.

- Patch 1/2" down to a featheredge
- Fast-setting—install flooring in 30–45 minutes
- 4,200 psi compressive strength
- Zero VOC

**Available in:**            **Item Number:**

**9.75 lb. Pure Pak\***      **71-5581-5311**

**25 lb. plastic bag**      **71-5581-3011**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

\* Registered trademark of Excello Corporation



**TEC® Fast-Set Deep Patch**



**VersaPatch® Latex Modified Floor Patch**

## Surface Preparation



# Surface Preparation

## Patch Additive

**861**

This additive is designed to improve the adhesion, bond strengths and flexural strengths of TEC® brand dry powder surface preparation products. Use as an admixture for TEC VersaPatch®, Fast-Set Deep Patch and PerfectFinish™.

- Freeze/thaw stable
- Highly water resistant when cured
- Low VOC

**Available in: Item Number:**

**1 gallon jug 33-1512-5011**



## Level Set® Wear Topping

**058 / 057 / 054**

A premium, calcium aluminate, cement-based, high strength topping designed for use in malls, retail establishments, lobbies, high end hotels, light manufacturing and warehouses, where a hard, flat, smooth surface is desired. Also used for industrial applications subject to constant foot and vehicle traffic, countertops and to correct imperfections in new construction.

- Accepts foot traffic in 2-3 hours and rubber wheel traffic within 48 hours
- Easy to trowel
- Mold and mildew resistant
- High compressive strength - 6000 psi (42.1 MPa)
- Zero VOC
- Contributes to LEED® project points

**Available in: Item Number:**

<b>50 lb. bag</b>	<b>71-6084-4813 Gray</b>
<b>50 lb. bag</b>	<b>71-6033-4813 White</b>
<b>50 lb. bag</b>	<b>71-6018-4813 Bright White</b>





# Overlayment and Self-Leveling Underlayments

## Fiber-Reinforced Underlayment

**565**

A pumpable/pourable, cement-based product that can be used as a self-leveling underlayment over a variety of substrates. The resulting smooth finished surface is ideal for the installation of all types of floor covering, including carpet, ceramic or natural stone tile, resilient, laminate flooring and wood flooring.

- Walkable in 2-4 hours - install flooring in 6 hours
- From 1/16"–1 1/2" depth in a single pour
- Can be used over green concrete (RH 95% or lower)
- High compressive strength
- 6,000 psi (41.0 MPa)
- Triple-fiber reinforced, extremely low shrinkage
- Zero VOC

**Available in: Item Number:**

**50 lb. bag 70-5225-3113**



## Level Set® LW-60 Ultra-Lightweight Self-Leveling Underlayment

**053**

This is the ideal choice for an underlayment when the weight of materials is a critical factor in load bearing structures. It is a unique, ultra-lightweight, self-leveling underlayment that provides a flat, smooth, durable surface for finished flooring installation, at half of the weight of a conventional portland cement or gypsum-based underlayment—just 60 pounds/cubic foot.

- Walkable in 3-4 hours
- Applications from 1/4"-2" neat; can be featheredged to adjoining elevations
- Accepts non-moisture sensitive tile and stone in 4 hours
- Install moisture sensitive floor covering in 16-24 hours
- Pumpable or pourable for thick-buil applications
- Zero VOC

**Available in: Item Number:**

**25 lb. bag 71-6124-3013**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

**Surface Preparation**

# Surface Preparation

## Level Set® Deep Pour 3 Self-Leveling Underlayment 003

This product is ideal for thick-build applications. It is a calcium aluminate, cement-based, self-leveling underlayment that provides a flat, smooth, durable surface up to 3" (76 mm) in one lift.

- Walkable in 3-4 hours
- Up to 3 inches deep in one pour
- Accepts non-moisture sensitive tile and stone in 4 hours
- Install moisture sensitive floor covering in 36-48 hours
- Pumpable or pourable for thick-build applications
- Zero VOC
- Contributes to LEED® project points

**Available in:**      **Item Number:**  
**50 lb. bag**      **71-6208-3111**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.





## Level Set® 300 Self-Leveling Underlayment

This calcium aluminate-based, fiber-reinforced, self-leveling underlayment provides a flat, extremely smooth and durable surface for finished flooring installation. It can accept tile and stone applications in as little as 4 hours, is pourable and pumpable and can be applied up to 2" (50 mm) neat in single applications and can be featheredged to adjoining elevations.

- Walkable in 2-3 hours
- Install moisture sensitive floor coverings in 16-24 hours
- Can be applied up to 5" (12 cm) with proper aggregate
- High compressive strength—5,500 psi (38.0 MPa)
- Zero VOC
- Contributes to LEED® project points

**Available in:**      **Item Number:**  
**50 lb. bag**      **71-6123-3111**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



**Surface Preparation**

# Surface Preparation

## Level Set® 200 Self-Leveling Underlayment 200

This calcium aluminate-based, self-leveling underlayment is ideal for use to level and smooth floors, before finished floor covering installations. It can accept tile and stone applications in as little as 4 hours. It delivers extended 25-35 minute working time without compromising flooring installation time.

- Walkable in 3-4 hours
- Install moisture sensitive floor covering in 16-24 hours
- High compressive strength—5,000 psi (34.5 MPa)
- Zero VOC
- Contributes to LEED® project points

**Available in:**      **Item Number:**  
**50 lb. bag**      **71-6074-3111**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Contractor Grade Self-Leveling Underlayment 567

This pumpable/pourable cement based self-leveling underlayment is designed for use over a variety of substrates. The resulting smooth finished surface is ideal for the installation of all types of floor covering, including carpet, ceramic or natural stone tile, resilient, laminate flooring and wood flooring (for interior dry area use only).

- Walkable in 4-6 hours
- Install ceramic tile in 24 hours and finished floor coverings in 48 hours
- Use directly over green concrete (RH 95% or Lower)
- Thickness ranges from 1/16" up to 1" depth in a single pour, up to 5" (12 cm) with proper aggregate
- Zero VOC
- Contributes to LEED® project points

**Available in:**      **Item Number:**  
**50 lb. bag**      **70-6209-3111**



Product contains 25% pre-consumer recycled content.

Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



# Primers

## Multipurpose Primer

**560**

This acrylic, latex-based primer can be used with TEC® brand self-leveling underlayments. It may also be used to enable the bonding of other TEC brand surface preparation products and latex modified thin set mortars to difficult substrates such as metal, glazed ceramic tile, gypsum-based underlayments, concrete treated with certain types of curing compounds (silicate or acrylic resin curing compounds only) and well bonded epoxy coatings. Use to prime resin and metal backings on natural stone and install with latex modified thin set instead of epoxy mortar. For peel and stick tile installation, this primer can be used on dry, porous concrete, gypsum cement underlayments and plywood. It may also be used to promote bond over cold-rolled steel substrates.

- One primer for all approved porous and non-porous substrates
- Easy to apply with brush or roller for non-porous surfaces or push broom for porous surfaces
- Low VOC
- Contributes to LEED® project points

**Available in:**    **Item Number:**

<b>1 quart jug</b>	<b>70-5008-5111</b>
<b>1 gallon jug</b>	<b>70-5008-5013</b>
<b>5 gallon pail</b>	<b>70-5008-1513</b>



## Level Set® Epoxy Primer

**052**

This fast setting, two-component 100% solids, moisture tolerant primer is used for the installation of TEC Level Set Underlayments and Wear Toppings and can also be used as a general primer. Level Set Epoxy Primer has been specifically formulated to accept a sand broadcast to work as a general purpose primer. This epoxy primer with has a high degree of crack resistance and surface finish strength.

- Single application
- Fast setting—ready to apply over in 3-4 hours
- Reduces pin-holes from out gassing of concrete
- Reduces cracking in underlayments and toppings
- Meets and exceeds ASTM C881 Type III (exception is this has an improved gel time)
- Low VOC
- Contributes to LEED® project points

**Available in:**    **Item Number:**

<b>2 gallon kit</b>	<b>71-6457-9358</b>
---------------------	---------------------



**Surface Preparation**

# Flooring Adhesives



## INNOVATIVE SOLUTIONS TO HELP YOU WORK SMARTER

TEC® flooring adhesives provide you with the options you need for your most demanding flooring installations. From vinyl to carpet, wood to wall base, TEC flooring adhesives offer lasting performance and dependable solutions.

- Multipurpose Adhesives
- Carpet Adhesives
- Resilient Adhesives
- Cove Base Adhesives
- Wood Flooring Adhesives

### ***TEC High Moisture Technology (HMT)***

Adhesives with this designation withstand up to 99% RH or 10 lbs. moisture vapor emission rate (MVER) in a single application. This advanced technology saves time and money by taking the labor out of the moisture mitigation process, over newly poured concrete with declining values.





# Multipurpose Adhesives

## The Perfect Putdown®

717

This adhesive is designed for the installation of most carpet and mineral felt backed, fiber backed and paper backed resilient sheetgoods. It is recommended for use with most common carpet backings, and also provides the strong initial tack required for hard-to-bond backings. Use for installations over freshly poured concrete with a vapor barrier in place.

- 20 to 40 minutes working time
- Withstands 86% RH or up to 8 lbs. MVER in new concrete
- Low odor
- Zero VOC

**Available in:**      **Item Number:**

**4 gallon pail**      **33-0016-1311**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## The Pro® Carpet and Flooring Adhesive

722

This easy spreading carpet and flooring adhesive is designed for the installation of mineral felt backed, fiber backed and paper-backed resilient sheetgoods and carpet. Recommended for indoor use and most common floor backings.

- Dual purpose for carpet and felt backed sheetgoods
- Strong initial tack required for hard-to-bond backings.
- 20-40 minute work time
- Low odor
- Zero VOC

**Available in:**      **Item Number:**

**4 gallon pail**      **33-0017-1311**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Contract Multipurpose Adhesive

700

A multipurpose adhesive that provides value and performance for many types of installations including sheetgoods and carpet to approved substrates. Not for use with fiberglass backed sheetgoods.

- Non-flammable
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Solvent free
- Zero VOC

**Available in:**      **Item Number:**

**4 gallon pail**      **33-0011-1311**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Flooring Adhesives

# Flooring Adhesives

## Universal Multipurpose Adhesive

### 706

This adhesive is specially formulated to bond carpet and fiber backed sheet goods to all approved substrates, and provides ample open time. Can be used for installations over fresh concrete slabs. Please refer to the product data sheet for complete details.

- Provides extra slip time to position sheet goods
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Multipurpose for carpet and mineral backed sheetgoods
- Low odor
- Zero VOC

Available in:	Item Number:
1 gallon pail	70-4741-5013
4 gallon pail	70-4741-1311



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Carpet Adhesives

### Wall Carpet Adhesive

#### 705

Formulated for the installation of carpet on interior walls, this adhesive provides the quick grab necessary for minimal slippage while providing ample working time for the installer. Not recommended for vinyl back or vinyl fusion bonded carpet.

- Long open time
- Excellent wet suction
- Zero VOC

Available in:	Item Number:
4 gallon pail	70-4737-1311



### Wet-Set and Outdoor Carpet Adhesive

#### 975

This adhesive is a high strength formula that allows for the immediate placement of closed cell carpets. It is extremely low odor, and is ideal for use in occupied buildings.

- Up to 8 lbs. MVER/86% RH
- Rapid-setting and drying times for accelerated installations
- Zero VOC

Available in:	Item Number:
1 gallon pail	70-4748-5011
4 gallon pail	70-4748-1311



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.



## Premium Fast Grab Carpet Adhesive 704

This premium adhesive is used to install carpet or fiber-backed sheet goods to all approved substrates. It withstands 86% RH or up to 8 lbs. MVER in new concrete. This product is highly water-resistant when cured.

- Great for high traffic areas
- Solvent free
- Zero VOC

**Available in:**      **Item Number:**  
**4 gallon pail**      **33-0471-1311**



Conforms with LEED® v4 low emitting interiors.  
 Compliant with (CDPH) Standard Method  
 v1.2 VOC Emissions.

## Double-Stick Carpet Adhesive 902

This adhesive is specially formulated with an extended open time for the installation of pattern matched goods. It withstands 90% RH or up to 8 lbs. MVER in new concrete. This adhesive's characteristics make it equally suited for installing carpet using the Double Bond or Direct Glue method of installation.

- Extended open time for installation of pattern matched goods
- Solvent free
- Low odor

**Available in:**      **Item Number:**  
**4 gallon pail**      **72-1673-1311**



Conforms with LEED® v4 low emitting interiors.  
 Compliant with (CDPH) Standard Method  
 v1.2 VOC Emissions.

## Releasable Pressure Sensitive Adhesive 749

This adhesive is designed for modular carpet tiles and Double Bond carpet cushions. It has a durable tack for an aggressive bond, yet is releasable to allow for ease of replacement. It is extremely low odor, so it is ideal for occupied buildings.

- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Withstands 90% RH or up to 10 lbs. MVER in new concrete
- Low odor
- Zero VOC

**Available in:**      **Item Number:**  
**1 gallon pail**      **70-4736-5011**  
**4 gallon pail**      **70-4736-1311**



Conforms with LEED® v4 low emitting interiors.  
 Compliant with (CDPH) Standard Method  
 v1.2 VOC Emissions.

## Flooring Adhesives

# Flooring Adhesives

## 10 Carpet Pad Adhesive

10

A solvent-free, synthetic, latex-based adhesive formulated to adhere carpet cushion to porous and non-porous substrates. Secures cushion in place quickly to facilitate fast carpet installations. Prevents wrinkling and shifting during the stretch-in method of installation.

- Fast curing
- Zero VOC

<b>Available in:</b>	<b>Item Number:</b>
1 gallon bottle	70-4744-5011



## Universal Solvent-Free Seam Sealer

131

A latex-based, non-flammable, carpet seam sealer specially formulated to prevent edge raveling and to seal the seams of most commercial and outdoor carpets including vinyl backs in direct glue down, stretch in, and double glue down installations. It is compatible with most carpet backings ActionBac<sup>®</sup>, jute, latex unitary, wovens, rubber backed, urethane (attached cushion). It is fast setting and moisture proof. Adhesive is freeze/thaw stable to 10°F (-12°C). Not for use with vinyl sheet goods.

- Solvent-free
- Fast curing
- Moisture proof

<b>Available in:</b>	<b>Item Number:</b>
8 fl. oz. bottle	70-4827-5411



\* ActionBac<sup>®</sup> is a registered trademark of Propex Inc.



# Resilient Adhesives

## RollFast™ Vinyl Flooring Adhesive

776

This vinyl flooring adhesive allows you to roll through flooring installations fast and effectively. This unique formulation dries quickly, has excellent resistance to moisture and alkali, provides a long open time, is easy to clean up and is low-odor.

- Extended open time - 6 to 8 hrs
- Fast drying; accepts flooring in 10-15 minutes
- Heat weld as soon as 60 minutes
- Moisture resistant up to 95% RH
- Solvent free
- Low odor
- Low VOC

**Available in:**      **Item Number:**

**1 gallon jug**      **71-8870-5011**

**4 gallon pail**      **71-8870-1311**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## TrowelFast™ Vinyl Flooring Adhesive

778

This vinyl flooring adhesive has a unique formulation that dries quickly, has excellent resistance to moisture and alkali, provides a long open time, is easy to clean up and is low-odor. It is ideal for heavy rolling loads (hospital beds, furniture, etc.)

- Extended open time - 6 to 8 hrs
- Fast drying; accepts flooring in 10-15 minutes
- Heat weld as soon as 60 minutes
- Moisture resistant up to 99% RH
- Solvent free
- Low odor
- Low VOC

**Available in:**      **Item Number:**

**3.5 gallon pail**      **72-0090-1211**



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

# Flooring Adhesives

## Flexera™ Premium Universal Adhesive

774

This solvent-free, pressure-sensitive adhesive is formulated for the installation of dimensionally stable luxury vinyl tile, vinyl plank, PVC, Olefin backed carpet tile, VCT, quartz tile, bio-based tile, fiberglass-backed sheet flooring and vinyl backed resilient sheet flooring. Designed for installation over porous and non-porous substrates, this high-strength adhesive can handle foot traffic in as little as four hours.

- Versatile
- High strength
- MVER – up to 10 lbs/99% RH
- Accepts flooring in 10-15 minutes (permanent applications)
- Extended open time (6-8 hrs)
- Low VOC
- LEED compliant
- Floor Score Certified



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

**Available in:**      **Item Number:**

**4 gallon pail**      **72-1645-1311**

## Clear Thin Spread Adhesive

713

This solvent-free adhesive is a permanent, pressure-sensitive, latex adhesive. It will suppress the moisture from the hydration process of freshly poured cement.

- Extended open time
- Withstands up to 10 lbs. MVER or 90% RH in new concrete
- Light color, dries to transparent film
- Low odor
- Zero VOC



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

**Available in:**      **Item Number:**

**1 gallon pail**      **33-0014-5013**

**4 gallon pail**      **33-0014-1311**





## Solid Vinyl Plank and Tile Adhesive

744

This solvent-free adhesive is designed for the installation of solid vinyl tile over non-porous floors. It has excellent resistance to moisture and plasticizer migration.

- Extended open-time
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Dries clear
- Low odor
- Zero VOC

**Available in:** **Item Number:**

1 gallon pail 70-6966-5011

4 gallon pail 70-6966-1311



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Premium Transitional Vinyl Adhesive

752

A solvent-free, acrylic latex adhesive with an aggressive initial tack formulated for the installation of LVT plank and fiberglass back sheetgoods. This high strength adhesive is made for installations over porous and non-porous substrates.

- Extended open time
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 3 cycles
- Excellent resistance to moisture and plasticizer migration
- Light color – dries to a transparent film
- Low odor
- Zero VOC

**Available in:** **Item Number:**

4 gallon pail 70-4729-1311



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Cove Base Adhesive

### Premium Wall and Cove Base Adhesive

714 / 714 W

A solvent-free cove base adhesive developed for use with rubber, vinyl or Thermoplastic Rubber (TPR) wall base.

- Outstanding wet suction for wrapping corners
- Freeze/thaw stable to 10°F (-12°C) for a minimum of 5 cycles
- Excellent water resistance and non-staining properties
- Low odor
- Low VOC

**Available in:** **Item Number:**

29 oz. cartridge 33-0015-6211 Tan

29 oz. cartridge 70-4743-6211 White

2 gallon pail 33-0015-1011 Tan



Conforms with LEED® v4 low emitting interiors.  
Compliant with (CDPH) Standard Method  
v1.2 VOC Emissions.

## Flooring Adhesives

# Flooring Adhesives

## Wood Flooring Adhesives

### Wood Assure™ Premium Urethane Wood Flooring Adhesive and Moisture Barrier 804

This product offers top-of-the line urethane adhesive performance with sound control properties and no pre-installation moisture testing required\*. Easy to trowel and clean up, it saves installation time and eliminates the need for multiple product applications.

- Moisture vapor protection
- Zero VOC

**Available in:**      **Item Number:**  
**3.5 gallon pail**    **72-1259-1211**



### Wood Endure™ Advanced Performance Wood Flooring Adhesive 806

This adhesive has a modified silyl technology that delivers superior bond strength, sound control properties and moisture protection – no pre-installation moisture testing is required\*.

- Extremely easy to trowel
- Zero Isocyanates
- Zero VOC


**Available in:**      **Item Number:**  
**3.5 gallon pail**    **72-1416-1211**



\* No moisture testing or mitigation needed when there is no visible moisture present.



Wood Assure™

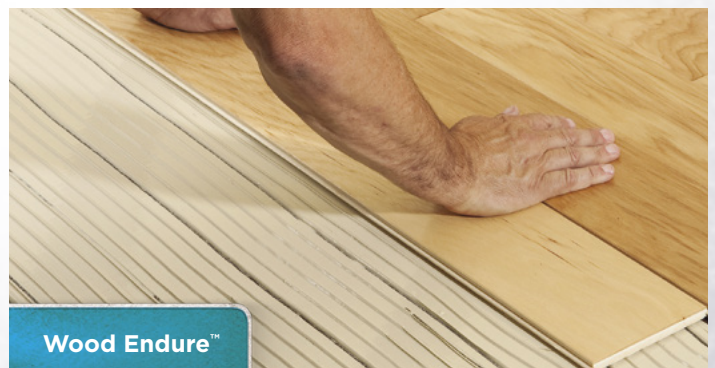

Wood Endure™



## Wood Go™ Urethane Wood Flooring Adhesive 802

This is your everyday, go-to, urethane adhesive for wood flooring. It has superior ridge retention to keep the wood aligned during installation, so that no hollow spots exist in the finished floor.

- Extremely easy to trowel
- Low VOC

Available in:	Item Number:
3.5 gallon pail	72-1228-1211
5 gallon pail	72-1228-1511



## Wood Ready™ Engineered Wood Flooring Adhesive 800

This adhesive is formulated especially for the challenges of engineered wood\* flooring. Wood Ready™ works well for installing all wood flooring widths and thicknesses.

- Extended open time
- Extremely easy to trowel
- Low VOC

Available in:	Item Number:
4 gallon pail	72-1262-1311



\* Domestic species e.g. oak, maple, hickory, ash etc.



## Flooring Adhesives

## Moisture Control 25 Year System Limited Warranty

H.B. Fuller Construction Products Inc. ("HBF-CP") warrants, to the owner ("Owner") of the premises in which the product ("Product") listed below is applied, that the Product, when installed as a complete system<sup>1</sup> ("System"), will, for the period described below:

- reduce the moisture vapor emissions of LiquiDam™ or LiquiDam EZ™ treated concrete substrate from a maximum of 25 pounds per 1000 sq. ft./24 hours as determined by the Calcium Chloride Test Method ASTM F1869 (or 100% RH using the Relative Humidity Method ASTM F2170-09) to no more than 3 pounds per 1000 sq. ft./24 hours
- if moisture vapor emissions comply with above, and the TEC® products listed in the table below are used as a complete System, the System a) will not fail due to a manufacturing defect, b) will prevent flooring damage and bond failure caused by vapor emissions from the concrete substrate.

provided that the Product was properly applied as a System within its applicable shelf life and in accordance with HBF-CP's written guidelines, Product Data Sheets and Specifications found at [tecspecialty.com](http://tecspecialty.com) in effect on the date of its application and consistent with all applicable building codes and industry standards and guidelines, including the TCNA Handbook when applicable, and procedures for professional application to the extent they are consistent with HBF-CP's written guidelines and specifications.

TEC® 25 Year Moisture Control Systems				
TEC® Moisture Vapor Barrier Product	with	TEC® Surface Preparation Products	and	TEC® Flooring Adhesive Products
<b>TEC® 213</b> LiquiDam™ Moisture Vapor Barrier		<b>TEC® 053</b> Level Set® LW-60 High Quality, Ultra-Lightweight Self-Leveling Underlayment		<b>TEC® 10</b> Carpet Padding Adhesive
		<b>TEC® 003</b> Level Set® Deep Pour 3 Self-Leveling Underlayment		<b>TEC® 702</b> Double-Stick Carpet Adhesive
		<b>TEC® 054 / 057 / 058</b> Level Set® Wear Topping		<b>TEC® 704</b> Premium Fast Grab Carpet Adhesive
		<b>TEC® 059</b> Floor Patch Pro		<b>TEC® 705</b> Wall Carpet Adhesive
		<b>TEC® 200</b> Level Set® 200 Self-Leveling Underlayment		<b>TEC® 713</b> Clear Thin Spread Adhesive
		<b>TEC® 300</b> Level Set® 300 Self-Leveling Underlayment		<b>TEC® 714 / 714W</b> Premium Cove Base Adhesive
		<b>TEC® 305</b> Fast-Set Deep Patch		<b>TEC® 717</b> The Perfect Putdown® Carpet and Flooring Adhesive
		<b>TEC® 318</b> Smooth Start™ Standard Self-Leveling Underlayment		<b>TEC® 722</b> The Pro® Carpet and Flooring Adhesive
		<b>TEC® 330</b> Feather Edge Skim Coat		<b>TEC® 744</b> Solid Vinyl Plank and Tile Adhesive
		<b>TEC® 320</b> PerfectFinish™ Skim Coat		<b>TEC® 749</b> Releasable Pressure Sensitive Adhesive
<b>TEC® 214</b> LiquiDam EZ™ Moisture Vapor Barrier		<b>TEC® 323</b> EZ Level® Premium Self-Leveling Underlayment		<b>TEC® 752</b> Premium Transitional Vinyl Adhesive
		<b>TEC® 327</b> VersaPatch® Latex Modified Floor Patch		<b>TEC® 774</b> Flexera™ Premium Universal Adhesive
		<b>TEC® 560</b> Multipurpose Primer		<b>TEC® 776</b> RollFast™ Vinyl Flooring Adhesive
		<b>TEC® 563 / 564</b> Ultra Wear Surface		<b>TEC® 778</b> TrowelFast™ Vinyl Flooring Adhesive
		<b>TEC® 565</b> Fiber-Reinforced Underlayment		<b>TEC® 800</b> Wood Ready™ Engineered Wood Flooring Adhesive
		<b>TEC® 861</b> Patch Additive		<b>TEC® 802</b> Wood Go™ Urethane Wood Flooring Adhesive
				<b>TEC® 804</b> Wood Assure™ Premium Urethane Flooring Adhesive
				<b>TEC® 806</b> Wood Endure™ Advanced Performance Wood Flooring Adhesive
				<b>TEC® 975</b> Wet-Set and Outdoor Carpet Adhesive

<sup>1</sup> System = Use of TEC® Moisture Vapor Barrier product + TEC® Surface Preparation product/s + TEC® Flooring Adhesive product shown above. Products must be properly installed as LiquiDam™ or LiquiDam EZ™ system using approved methods, approved flooring, approved substrates and other materials as enumerated in TEC® Product Data Sheets.



## Surface Preparation and Flooring System Limited Warranty

H.B. Fuller Construction Products Inc. (“HBF-CP”) warrants, to the owner (“Owner”) of the premises in which the product (“Product”) listed below is applied, that the Product, when installed as a complete system<sup>1</sup> (“System”), will, for the period<sup>2</sup> described below:

- not break down or lose their bond or adhesion due to a manufacturing defect

provided that the Product was properly applied as a System within its applicable shelf life and in accordance with HBF-CP’s written guidelines, Product Data Sheets and Specifications found at [tecspecialty.com](http://tecspecialty.com) in effect on the date of its application and consistent with all applicable building codes and industry standards and guidelines, including the TCNA Handbook when applicable, and procedures for professional application to the extent they are consistent with HBF-CP’s written guidelines and specifications.

TEC® Surface Preparation and Flooring Systems			
TEC® Surface Preparation Products	with	TEC® Flooring Adhesive Products	Period
TEC® 053 Level Set® LW-60 High Quality, Ultra-Lightweight Self-Leveling Underlayment		TEC® 776 RollFast™ Vinyl Flooring Adhesive	Lifetime
		TEC® 778 TrowelFast™ Vinyl Flooring Adhesive	Lifetime
TEC® 003 Level Set® Deep Pour 3 Self-Leveling Underlayment		TEC® 774 Flexera™ Premium Universal Adhesive	25 Years
TEC® 054 / 057 / 058 Level Set® Wear Topping		TEC® 702 Double-Stick Carpet Adhesive	15 Years
TEC® 059 Floor Patch Pro		TEC® 704 Premium Fast Grab Carpet Adhesive	15 Years
TEC® 200 Level Set® 200 Self-Leveling Underlayment		TEC® 713 Clear Thin Spread Adhesive	15 Years
TEC® 300 Level Set® 300 Self-Leveling Underlayment		TEC® 717 The Perfect Putdown® Carpet and Flooring Adhesive	15 Years
TEC® 305 Fast-Set Deep Patch		TEC® 749 Releasable Pressure Sensitive Adhesive	15 Years
TEC® 318 Smooth Start™ Standard Self-Leveling Underlayment		TEC® 714 / 714W Premium Cove Base Adhesive	10 Years
TEC® 330 Feather Edge Skim Coat		TEC® 722 The Pro® Carpet and Flooring Adhesive	10 Years
TEC® 320 PerfectFinish™ Skim Coat		TEC® 744 Solid Vinyl Plank and Tile Adhesive	10 Years
TEC® 323 EZ Level® Premium Self-Leveling Underlayment		TEC® 752 Premium Transitional Vinyl Adhesive	10 Years
TEC® 327 VersaPatch® Latex Modified Floor Patch		TEC® 700 Contract Multi-Purpose Adhesive	5 Years
TEC® 560 Multipurpose Primer	with	TEC® Wood Flooring Adhesive Products	Period
TEC® 563 / 564 Ultra Wear Surface		TEC® 800 Wood Ready™ Engineered Wood Flooring Adhesive	Lifetime
TEC® 565 Fiber-Reinforced Underlayment		TEC® 802 Wood Go™ Urethane Wood Flooring Adhesive	Lifetime
TEC® 861 Patch Additive		TEC® 804 Wood Assure™ Premium Urethane Flooring Adhesive	Lifetime
		TEC® 806 Wood Endure™ Advanced Performance Wood Flooring Adhesive	Lifetime

<sup>1</sup> System = Use of TEC® Surface Preparation product + TEC® Adhesive product shown above. Products must be properly installed using approved methods, approved flooring, approved substrates and other materials as enumerated in TEC® Product Data Sheets.

<sup>2</sup> The Adhesive used dictates length of warranty for the system.









H.B. Fuller Construction Products  
(a subsidiary of H.B. Fuller Company) is a leading provider  
of technologically advanced construction materials and solutions  
to the commercial, industrial and residential construction industry.

The company's recognized and trusted brands –  
TEC®, CHAPCO®, Grout Boost®, Fortane™, Parabond® and others –  
are available through an extensive network of distributors  
and dealers, as well as home improvement retailers.

**For more information, visit [hbfuller-cp.com](http://hbfuller-cp.com).**

LiquiDam EZ™, LiquiDam™, VersaPatch®, Level Set® Wear Topping, Level Set® LW-60, Level Set® Deep Pour 3, Level Set® 300,  
Level Set® 200, Level Set® Epoxy Primer, The Perfect Putdown®, The Pro®, RollFast™, TrowelFast™, Flexera™, Wood Assure™,  
Wood Endure™, Wood Go™, Wood Ready™, are trademarks of H.B. Fuller Construction Products Inc.





**H.B. Fuller**  
CONSTRUCTION PRODUCTS

H.B. Fuller Construction Products Inc.  
1105 South Frontenac Street  
Aurora, IL 60504-6451  
800-832-9002  
hbfuller-cp.com

[tecspecialty.com](http://tecspecialty.com)

TEC® and the TEC® logo are trademarks of  
H.B. Fuller Construction Products Inc.  
LEED® is a registered trademark  
of U.S. Green Building Council

Form #: SPFA\_N1019-16  
©2019 H.B. Fuller Construction Products Inc.