

# 70% OF THE EARTH IS WATER. WOOD SECURE HELPS KEEP IT AWAY FROM YOUR WOOD FLOORING.



Your jobs deserve the best protection. Wood Secure™ Adhesive delivers 7-10x better moisture control for wood floors than reactive adhesives. Our proprietary polymers transform the installation process with robust adhesion, no toxic fumes, drill-free hollow spot repair and no moisture testing required. Plus, it is among the easiest to clean up and trowel, so you reap the benefits of working smarter not harder with TEC®.



Visit [TECspecialty.com](http://TECspecialty.com)






# Wood Secure™ Premium Wood Adhesive



Use under and over acoustic underlayments



Easy board replacement

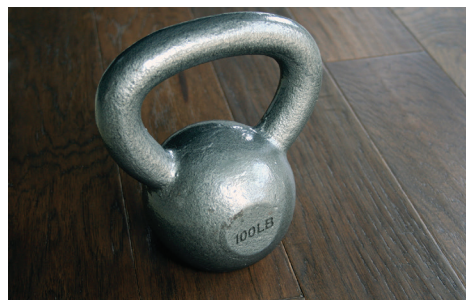


Easily re-bonds to correct hollow spots

## KEY FEATURES AND BENEFITS

- Ultra-low moisture vapor permeability—No moisture testing required
- Unlimited subfloor moisture control\*\*
- Easy hollow spot repair—No drilling or injecting
- Versatile—Bonds acoustic underlayments up to 5 mm
- Super-smooth troweling and easy clean up
- Allows faster, easier plank replacement vs. urethanes

\*Not for use with MDF/HDF core engineered flooring

\*\*When installed using the Moisture Control Method



**Superior Moisture Vapor Control**

**Easy Hollow Spot Repair**



**Ultra-Versatility**

## Suitable Substrates




- Concrete
- Portland based underlayment
- Properly prepared gypsum; with two coats of primer applied
- OSB, including ADVANTECH BOARD
- APA Approved Plywood
- Terrazzo that is properly prepared; sanded to open the porosity, vacuumed, then cleaned with mineral spirits or alcohol
- Fiber Cement Underlayment
- Radiant Heated Subfloors

## Packaging

4 gallon plastic pail (15.1 L)

Product # 10014526

## Coverage

Flooring Type	Trowel Size	Approximate Coverage
<b>For Subfloor Moisture Vapor Protection</b>		
Engineered Wood And 3/4" Solid-Shorts up to 18" Long	 1/4" x 1/4" V-Notch Trowel	30-35 ft <sup>2</sup> /gal. (0.7-0.9 m <sup>2</sup> /L)
<b>For Glue-Down Only Installations</b>		
Engineered Wood	 3/16" x 1/4" x 5/16" Flat V-Notch Trowel	50-60 ft <sup>2</sup> /gal. (1.2-1.5 m <sup>2</sup> /L)
<b>For Gluing Sound Control Materials to the Subfloor</b>		
For Gluing Sound Control Materials to the Subfloor	 1/16" x 1/16" U-Notch Trowel	165-175 ft <sup>2</sup> /gal. (4.0-4.3 m <sup>2</sup> /L)

## Technical Data

### Physical Properties

Description	
Base	TEC Specialty Proprietary Technology
Color	Tan
VOC Content	<8 g/L
Consistency	Thick paste
Trowelability	Smooth
Shelf Life	Two years in unopened container
Storage Conditions	40°-95°F (4°-35°C) in a dry location
Application Temperature	55°-95°F (18°-35°C)
Traffic Restrictions	Light foot traffic after 8 hours Heavy traffic in 24 hours
Open Time/Working Time	40-60 minutes, depending on ambient conditions
Freeze/Thaw Stability	Up to 5 cycles at 10°F (-12°C)

For details about TEC® product or system warranties, contact your sales associate or visit [tecspecialty.com](http://tecspecialty.com).

Scan for  
Online  
Coverage  
Calculator



To learn more, visit [tecspecialty.com](http://tecspecialty.com)



TEC Specialty Products LLC  
1105 South Frontenac Street  
Aurora, IL 60504-6451



TECInstallationSystems



@tecinstallationsystems



TECInstallationSystems



TEC Installation Systems

©Copyright 2025 TEC Specialty Products LLC  
TEC®, the TEC® logo and Wood Secure™ are trademarks of  
TEC Specialty Products LLC

SSTWSPWA R0925-20