

Superior In Performance. Unmatched In Design.



TEC® AccuColor EFX® Epoxy Grout and Mortar



TEC® AccuColor EFX® Epoxy Grout and Mortar redefines traditional epoxies by improving stain resistance, UV color stability and ease of use. With 12 standard colors and an infinite number of special order colors (minimum quantities apply), AccuColor EFX® gives you the flexibility to meet the performance and design requirements your projects demand.

Contact your local sales rep to request a demo.
Have a question? Visit TECQuestions.com.

To learn more, visit TECSpecialty.com

See Reverse for More Information





AccuColor EFX® Epoxy Grout and Mortar


A dual-purpose grout/mortar, three-part epoxy system for interior (both interior/exterior when used as grout) floors, walls and countertops is designed for residential to extra heavy commercial use. Used as a grout, this system is recommended wherever complete stain or chemical resistance is required and/or desired. High temperature formula is approved for surfaces subject to extreme heat or steam cleaning up to 350°F (177°C). Used as a mortar, this system is ideal for installing green marble and other moisture-sensitive stones and agglomerates over a wide variety of substrates, including cold rolled steel. For details about TEC® product or system warranties, contact your sales associate or visit tecspecialty.com.



Excellent stain and chemical resistance



Superior UV stability

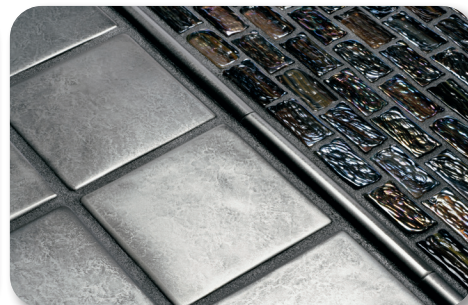

Exceeds ANSI A118.3 specifications

Additional Features and Benefits

- Extremely durable and impact resistant
- For grouting installations in food service operations such as commercial kitchens where enzymatic cleaners are used
- Ideal for grouting walls up to 1/4" (6 mm) grout joint, floors, and countertops
- Meets or exceeds ANSI A118.3 Standards
- Contributes to LEED® project points with Part A containing 12% pre-consumer recycled content
- Zero VOC

Technical Data

Physical Properties

Description	
Physical State	Paste, once mixed
Pot Life [at 70°F (21°C)]	90 minutes*
Initial Set	10 to 14 hours*
Final Cure	28 days
Foot Traffic Rating (ASTM C627)	Residential to Extra Heavy Commercial (depending on substrate)
Storage	Store in cool, dry location. Do not store in direct sunlight. Do not store open containers.
Shelf Life	Maximum shelf life is from date of manufacture in properly stored, unopened package. Part A: 18 months Part B: 12 months Part C: Unlimited

*Temperature and humidity will affect pot life and cure time

Packaging

3 Gallon (11.35 L) Kit:

Part A: Two 1/2 Gallon (64 fl. oz.) (1.89 L), Resin/Pigment sold separately

Parts B & C: Two 22.6 fl. oz. (.67 L) Part B and two 11.1 lbs (5.03 kg)

Parts B & C packaged in a 5 gallon plastic pail (18.92 L)

Coverage

Figures shown in the chart are presented only as guidelines. For tile sizes not listed, see the coverage calculator at tecspecialty.com

Tile Size	Joint Width in inches (mm)									
	1/16" (1.6)	1/8" (3)	1/4" (6)	3/8" (9)	1/2" (12)	5/8" (16)	3/4" (19)	7/8" (22)	1" (25)	1 1/8" (29)
	Approximate coverage in square feet (m²)									
	per 3 gallon kit (11.35 L)					per 1.5 gallon kit (5.68 L)				
1" x 1" x 1/4" (25 x 25 x 6 mm)	114 (10.6)	57 (5.3)	28 (2.6)	19 (1.8)	14 (1.3)	57 (5.3)	29 (2.7)	14 (1.3)	10 (0.9)	7 (0.7)
2" x 2" x 1/4" (50 x 50 x 6 mm)	229 (21.3)	114 (10.6)	57 (5.3)	38 (3.5)	28 (2.6)	115 (10.7)	57 (5.3)	29 (2.7)	19 (1.8)	14 (1.3)
4 1/4" x 4 1/4" x 5/16" (108 x 108 x 8 mm)	339 (36.1)	194 (18.0)	97 (9.0)	64 (5.9)	48 (4.5)	195 (18.1)	97 (9.0)	49 (4.5)	32 (3.0)	24 (2.3)
4" x 8" x 1/2" (100 x 200 x 12 mm)	305 (28.3)	152 (14.1)	76 (7.1)	50 (4.6)	38 (3.5)	153 (14.2)	76 (7.1)	38 (3.6)	25 (2.3)	19 (1.8)
6" x 6" x 5/16" (150 x 150 x 8 mm)	549 (51.0)	274 (25.5)	137 (12.7)	91 (8.5)	68 (6.3)	275 (25.5)	137 (12.8)	69 (6.4)	46 (4.3)	34 (3.2)
6" x 6" x 1/2" (150 x 150 x 12 mm)	343 (31.9)	171 (15.9)	85 (7.9)	57 (5.3)	42 (3.9)	172 (16.0)	86 (8.0)	43 (4.0)	29 (2.7)	21 (2.0)
8" x 8" x 5/16" (200 x 200 x 8 mm)	733 (68.1)	366 (34.0)	183 (17.0)	122 (11.3)	91 (8.5)	367 (34.1)	183 (17.0)	92 (8.5)	61 (5.7)	46 (4.3)
8" x 8" x 1/2" (200 x 200 x 12 mm)	458 (42.5)	229 (21.3)	114 (10.6)	76 (7.1)	57 (5.3)	229 (21.3)	115 (10.7)	57 (5.3)	38 (3.6)	29 (2.7)
12" x 12" x 5/16" (300 x 300 x 8 mm)	1099 (102.1)	549 (51.0)	274 (25.5)	183 (17.0)	137 (12.7)	550 (51.1)	275 (25.5)	137 (12.8)	92 (8.5)	69 (6.4)
16" x 16" x 5/16" (400 x 400 x 8 mm)	1466 (136.2)	733 (68.1)	366 (34.0)	244 (22.7)	183 (17.0)	733 (68.1)	367 (34.1)	183 (17.0)	122 (11.4)	92 (8.5)

*Not for wall grout applications.

To learn more, visit TECSpecialty.com



TEC Specialty Products LLC | 1105 South Frontenac Street, Aurora, IL 60504-6451



@TECInstallationSystems



tecinstitutionsystems



TECInstallationSystems



TEC Installation Systems